





LEADING DESIGNER AND MANUFACTURER OF MOBILE STAGES AND PROMOTIONAL UNITS



■ CONFIGURATION:

50' x 38' (15.24 m x 11.58 m) υρ το 90' x 56' (27.43 m x 17.07 m)

WITH COVERED WINGS AND BACKSTAGE

SET UP TIME:

4 to **5** hours

1 CERTIFIED TECHNICIAN

4 STAGEHANDS

■ WIND RESISTANCE:

90 MPH (145 km/H) WITHOUT WINDWALLS 60 MPH (97 km/H) WITH WINDWALLS

- FULL HEIGHT RAINPROOF WINDWALLS ON 3 SIDES
- CERTIFIED BY PROFESSIONAL ENGINEERS IN EVERY STATE AND PROVINCE











■ SPECIFICATIONS:

• Load bearing capacity: 58,000 lb (26,308 kg)

• Roof maximum load capacity: 42,000lb (19,051 kg)

• Roof maximum height: 33' (10.02 m) from deck

Clearance: 30' from deckLateral rigging beams:

For rigging sound including line arrays

Capacity: 8,000 lb (3,629 kg) per side **Height:** 39'-6" (12.04 m) from ground

• Overall height from ground: 45'-2" (13.76 m)

Floor:

Size: 50' x 38' (15.24 m x 11.58 m)

Capacity: Rated at 150 lb / sq. ft (732 kg/m²)

Height: 6' to 7'-6" (1.82 m to 2.29 m)

Roof: fiberglass bonded to steel

• 16 rigging points (4 moveable)

1 stairway with handrails

OPTIONAL:

• Fire retardant windwalls on 3 sides:

Vinyl or mesh
Full color graphic printing

Skirting

Covered wing extensions:

Refer to covered wing specifications

Sound wing extensions:

 $16' \times 16'$ ($4.88 \text{ m} \times 4.88 \text{ m}$) with guardrails

 Additional decks: up to 90' x 56' (27.43 m x 17.07 m) with 4' x 8' (1.22 m x 2.44 m) platforms (requires additional transportation)

■ 1 Rooftop banner support:

up to 97' x 5' (29.57 m x 1.52 m)

2 Lateral banner supports:

up to 22' x 32' (6.86 m x 9.75 m)

Lateral overhang trussing extension:


for 22' (6.86 m) banners

Publicity space:

Rolling billboard to maximize visibility during transportation Multiple banners of various sizes attach to structure for optimum visibility

Guardrails



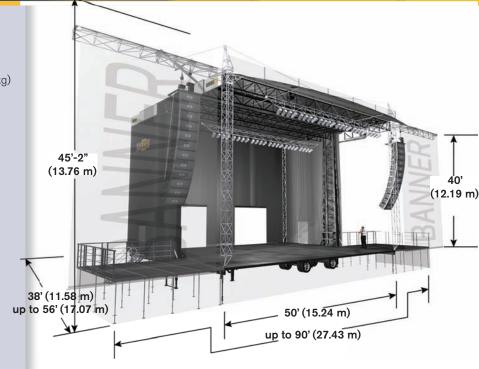

Set up Time:

4 hours



Manpower:

5 x



Why the industry chooses Stageline® products:

Manufacturing: Stageline has built over 500 units.

Expertise: Stageline has been designing mobile stages for over 25 years.

100% fail proof history: Best safety record in the industry.
Reliability in engineering: Highest wind resistance, with or

without windwalls.

Wide range of models: SL50, SL100, SL100-Mix, SL260,

SL320, SAM555, Promobile, Covered wings & Backstage. **Rain or shine:** Complete rainproofing with full height windwalls and

downstage canopies.

Single trailer: All stage components travel in one stage trailer unit.

Quality: Designed and built to last over 25 years. All units built to date are still in operation.

Quality controlled with a 600-point inspection.

Standards: All units are engineered to withstand 2 times the permitted load.

Tough, safe and economical, STAGELINE mobile stages are built and field-tested by production professionals to meet the needs of your most demanding and varied outdoor projects. With over ten thousand successful events in more than 35 countries each year, these innovative products are considered by many to be the industry standard.

